



Rec'd PCT/PTO 01 MAR 2005  
PC-GB2003/003354 #2



INVESTOR IN PEOPLE

# PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 17 SEP 2003

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

# PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)


Signed *Andrew Gersey*  
Dated 15 August 2003

CERTIFIED COPY OF  
PRIORITY DOCUMENT

BEST AVAILABLE COPY

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

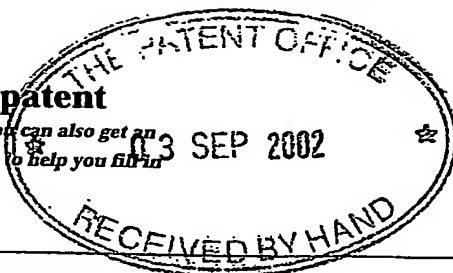

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference **MNM/P33852GB**

04SEP02 E745527-2 D00036  
P01/7700 0.00-0220460.0

2. Patent application number  
(The Patent Office will fill in this part)

**0220460.0**

**03 SEP 2002**

3. Full name, address and postcode of the or of each applicant (underline all surnames)

The Acrobot Company Limited  
Imperial College of Science, Technology & Medicine  
Department of Mechanical Engineering  
Mechatronics in Medicine Group  
Exhibition Road, London SW7 2BX  
**8458424001**  
England

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

**ROBOT HEAD**

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Kilburn & Strode  
20 Red Lion Street  
London  
WC1R 4PJ

Patents ADP number (if you know it)

**125001**

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

**YES**

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description	8
Claim(s)	5
Abstract	1
Drawing(s)	5 + 5 <i>He</i>

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to grant of a patent ( <i>Patents Form 7/77</i> )	0
Request for preliminary examination and search ( <i>Patents Form 9/77</i> )	1
Request for substantive examination ( <i>Patents Form 10/77</i> )	0
Any other documents ( <i>please specify</i> )	0

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 03.09.2002

*Kilburn & Stode*  
*KILBURN & STODE*

12. Name and daytime telephone number of person to contact in the United Kingdom  
M N Maggs  
Tel: 020 7539 4200

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

## ROBOT HEAD

The present invention relates to robot heads and particularly, although not exclusively, to a head for a surgical robot.

5

In one type of robotically-assisted surgical procedure, a cutting implement (for example to cut bone) is mounted on an adjustable robot head which is itself held in position by a static gross-positioning device. The robot head has a manually-graspable handle which allows the surgeon to move the cutter.

10

Typically, the cutter may be mounted at the end of a telescopic arm, and by applying force to the handle the surgeon may cause the arm to extend and/or to rotate about mutually-perpendicular pitch and yaw axes. Motors within the head respond to forces applied to the handle to ensure that the cutter moves smoothly to the position the surgeon requires. The head may include

15

constraint mechanisms, implemented either in hardware or in software, which prevent the surgeon from moving the cutter into regions which have previously been defined as unsafe. Force feedback mechanisms may also be provided so that the surgeon receives tactile force feedback through the handle.

20

Of particular importance in surgical applications – although it may be of importance in other applications as well – is the precision with which the cutter can be positioned by the surgeon. Current systems are somewhat limited in this respect, because of relatively high friction in the mechanical components, along with a certain amount of “play” or backlash. A further requirement of course is safety, and concerns have been expressed as to the potentially serious injuries that could be caused to a patient in the event of a mechanical failure of a traditional robot head, or a failure in the control system or its software.

25

It is an object of the present invention at least to alleviate these perceived difficulties.

According to a first aspect of the present invention there is provided a back-  
5 drivable robot head including:

- (a) a manually-graspable driving member;
- (b) a force sensor for sensing forces applied to the driving member by a user
- (c) an arm for carrying a tool the position of which is to be controlled;  
10 and
- (d) a first rotation control mechanism for rotating the arm about a first axis in response to the sensed forces;

characterised in that the first rotation control mechanism comprises a first  
rotational motor coupled to a first lead screw; and a bearing which moves  
15 longitudinally of the first lead screw as it rotates, the bearing being pivotally coupled to an offset crank of or secured to the arm.

According to a second aspect of the present invention there is provided a back-  
drivable robot head including:

- 20 (a) a manually-graspable driving member;
- (b) a force sensor for sensing forces applied to the driving member by a user
- (c) an arm for carrying a tool the position of which is to be controlled;  
and
- 25 (d) a first rotation control mechanism for rotating the arm about a first axis in response to the sensed forces;

characterised in that the first rotation control mechanism comprises a first  
rotational motor, an output of which is converted first to longitudinal motion  
and then back to rotational motion of the arm.

According to a third aspect of the present invention there is provided a back-drivable robot head including:

- (a) a manually-graspable driving member;
- (b) a force sensor for sensing forces applied to the driving member by a user
- (c) an arm for carrying a tool the position of which is to be controlled; and
- (d) a first rotation control mechanism for rotating the arm about a first axis in response to the sensed forces;

10 characterised in that the first rotation control mechanism comprises a first rotational motor, an output of which is converted first to longitudinal motion and then back to rotational motion of the arm; the head further including a first input encoder for measuring rotation of the first motor, a first output encoder for measuring the angular position of the arm about the first axis, and in which  
15 the measurement from the first output position encoder is compared with an expected arm position based on the measurement from the first input position encoder, an alarm being raised if the expected position is inconsistent with the actual position.

20 The invention may be carried into practice in a number of ways, and one specific embodiment will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a schematic view of a preferred surgical robot head, with the covers removed;

25 Figure 2 shows the rear mounting, for mounting the head onto a gross positioning device;

Figure 3 is a view from below, showing rotational control of the telescopic arm about a vertical axis;

30 Figure 4 shows the telescopic arm at one extreme end of its range of rotation;

Figure 5 shows the arm at the other extreme end of its range;

Figure 6 shows the pivotal connection between the offset crank and the lead screw;

Figure 7 shows the mounting of the motor that drives the lead screw;

5 Figure 8 shows the primary sensor which determines rotational position;

Figure 9 shows the telescopic arm at the two extreme limits of its range;

Figure 10 shows the tracks on which the telescopic arm moves.

10 Figure 1 shows a surgical robot head in accordance with a preferred embodiment of the invention. The head consists of a generally L-shaped frame 10 having an upper portion 12 and a lower portion 14. The upper portion 12 has a rotatable mounting 16, best shown in Figure 2, having a rear mounting plate 17 which allows the head to be bolted to a static gross positioning device (not shown). Once so mounted, the whole of the robot head  
15 can then rotate about a horizontal pitch axis, as shown by the arrows 18.

Mounted to the lower portion 14 of the frame is a telescopic arm 20, capable of extending and retracting by means of a motor 28, as shown by the arrows 22. The arm is mounted for rotation about a vertical yaw axis, as shown by the  
20 arrows 24. The horizontal pitch axis and the vertical yaw axis intersect on the longitudinal axis of the arm 20.

In use, a cutter (not shown) is inserted into a bore 26 at one end of the arm, and is locked into place by means of a locking handle 27.

25 The surgeon operating the device grasps a handle 30, and manually guides the cutter through the bone as required. Sensors within the handle 30 or between the handle and the body detect the forces that are being applied, and adjust the pitch, yaw and in/out motions accordingly, as will be described in more detail below. It will be understood of course that in the operating theatre most of the

mechanical parts displayed in Figure 1 will be hidden behind smooth external covers; these have been omitted from Figure 1 to expose the workings of the head.

5 Figure 3 is a view from below, showing the mechanism for controlling rotational movement of the arm 20 about the vertical yaw axis. Rotation of a lead screw 32 by means of a pancake or other motor 30' causes a ball screw or bearing 34 to move up and down the lead screw. The ball screw 34 is connected to an arm or crank 36 which is itself connected to the telescopic arm  
10 20. Accordingly, the yaw position of the arm 20 is controlled by the linear position of the ball screw 34 on the lead screw 32.

The crank arm 36 connects to the lead screw 32 by means of a pivoting linkage, to allow for the different angles of the crank arm as the ball screw 34 moves  
15 along. Movement also causes the lead screw 32 to rotate slightly about a pivot bearing 40 adjacent the motor 30'.

Figures 4 and 5 show, respectively, the arm 20 at each end of its range of movement. As may be seen, in both of these extreme positions, the lead screw  
20 32 is substantially horizontal in the drawing; compare this with Figure 3, in which the lead screw 32 has been pushed downwards slightly due to the length of the crank 36.

Figure 6 is a close-up view showing in more detail the pivotal coupling  
25 between the crank arm 36 and the lead screw 32. Figure 7 is a further close-up showing the pivotal coupling of the motor 30' and the crank arm 32 with respect to the lower part 14 of the frame.



As is best seen in Figure 6, the lead screw 32 is formed with a high lead angle: this allows for low gear ratios to be used, as well as allowing the system to be back drivable (in other words, the surgeon can simply pull the arm 20 around by grasping the handle 30 shown in Figure 1). With the arrangement described, no gear box is required, and the motor 30' (Figure 3) is simply attached directly to the end of the lead screw 32.

Turning back now to Figure 3, it will be seen that surrounding the vertical yaw axis is a cylindrical structure 37. This is used in order to determine the exact rotational position of the arm 20, in conjunction with an encoder generally indicated at 38. As is best shown in Figure 8, the cylindrical structure 37 defines a circumferential cam surface 40 onto which is secured a thin reflective strip 42. A sensor 44 picks up patterns (not shown) on the strip, from which the angular position of the arm 20 may be accurately determined. In this embodiment, a stop 46 defines a nominal zero position, with the actual position at any time simply being determined by counting the number of pulses the sensor 44 has detected as the arm moves away from the zero position. The use of a circumferential strip 42 as described substantially eliminates errors due to backlash.

In order to protect against mechanical or other fault, an additional safety sensor (not shown) is built into the motor 30'. Position signals from the motor's sensor and from the main sensor 44 are compared and, if there is any discrepancy, an alarm is raised and the power to the cutter is switched off immediately. Because of the changing angles of the crank arm 36, there is not a linear relationship between the pulses detected by the motor sensor and those detected by the main sensor 44. Accordingly, it is convenient for the comparison to be carried out in software. Suitable software will not be described here, as it is well within the capabilities of a skilled person in the

field to construct a function or a mapping defining the non-linear relationship, and then setting up a comparison with appropriate trigger points for switching off the power.

5     Turning back to Figure 1, it will be seen that the mechanism for controlling rotation of the head about the horizontal pitch axis, on the mount 16, is virtually identical to the mechanism already described for rotation about the vertical yaw axis. The mechanisms within the upper part 12 of the frame 10, and surrounding the mount 16, will not therefore be described separately.

10

Figure 9 shows the arm 20 in its retracted position 50 and in an extended position 52. Extension is effected by means of the motor 28 (Figure 1) which turns a lead screw 54. Unlike the motors for the yaw/pitch actions, this motor is fixed in position. As the motor rotates and the screw turns, a barrel portion 15     56 of the arm, mounted to a carriage, is moved along the guide tracks 58.

Between the rails 58 is a positioning strip 60. The position of the carriage with respect to this strip is sensed by means of a position sensor (not visible in the drawings) positioned beneath the barrel 56. Just visible at the left hand edge 20     of Figure 10 is a carriage stop which acts as a zero-point indicator. The exact location of the carriage along the rails 50 is determined by the number of pulses received by the sensor from corresponding markings on the strip as the carriage moves away from the zero point.

25     For additional security, a secondary sensor (not shown) is provided in association with the motor 28. A hardware or software comparison is made between the measured position of the barrel 56 as determined by the main sensor, and the position as determined by the secondary sensor. If the sensors

do not agree, an alarm is raised and power to the cutter is immediately switched off.

5 The manually-graspable knob 30, best seen in Figure 1, has a force sensor (not shown) mounted within it, along with associated wiring and electronics. The outer part of the knob is connected to the sensor which is itself connected to the arm 20. Hence, any force the surgeon applies to the knob 30, in any direction, will automatically be sensed by the sensor. The sensor generates control signals based upon the sensed forces which are used, along with details of the  
10 current head position and cutter constraints, to control the pitch and yaw motors 30', along with the arm extension motor 28. The motors are controlled so that the surgeon feels an increasing resistance as he pushes towards a constraint boundary, and decreasing resistance as he moves away. In an unconstrained region, the motors are controlled to give an equal low resistance  
15 to movement in any direction. For the present purpose, an unconstrained region means either:

- (a) when the constraints are switched off (e.g. during registration), or
- (b) far away from any boundary, inside the constraint region.

20 When the surgeon needs to cut bone, an appropriate cutter is pushed into the bore 26, and locked in place by the locking handle 27 (Figure 1). Alternatively, other surgical or medical instruments may be placed within the bore 26, depending upon the application.

25 The robot head described may also be used in non-surgical applications.

**CLAIMS:**

1. A back-drivable robot head including:

(a) a manually-graspable driving member;

5 (b) a force sensor for sensing forces applied to the driving member by a user;

(c) an arm for carrying a tool the position of which is to be controlled; and

10 (d) a first rotation control mechanism for rotating the arm about a first axis in response to the sensed forces;

characterised in that the first rotation control mechanism comprises a first rotational motor (30') coupled to a first lead screw (32); and a bearing which moves longitudinally of the first lead screw as it rotates, the bearing being pivotally coupled to an offset crank (34) of or secured to the arm.

15

2. A robot head as claimed in claim 1 in which the first motor and the first lead screw are mounted for pivotal motion with respect to a frame of the head.

3. A robot head as claimed in claim 1 or claim 2 in which the first motor is  
20 directly secured to the first lead screw, without any intervening gears.

4. A robot head as claimed in any one of the preceding claims in which the first lead screw has a high lead angle.

25 5. A robot head as claimed in any one of the preceding claims including a first output position encoder for measuring the angular position of the arm about the first axis.

6. A robot head as claimed in any one of the preceding claims including a first input position encoder for measuring rotation of the first motor.

5 7. A robot head as claimed in claim 5 and claim 6 in which the measurement from the first output position encoder is compared with an expected arm position based on the measurement from the first input position encoder, and an alarm is raised if the expected position is inconsistent with the actual position.

10 8. A robot head as claimed in any one of the preceding claims including a second rotation control mechanism for rotating the arm about a second axis, the said mechanism comprising a second rotational motor (30') coupled to a second lead screw (32); and a bearing which moves longitudinally of the second lead screw as it rotates, the bearing being pivotably coupled to an offset  
15 crank (34) of or secured to the arm.

9. A robot head as claimed in claim 8 in which the second motor and the second lead screw are mounted for pivotal motion with respect to a frame of the head.

20 10. A robot head as claimed in claim 8 or claim 9 in which the second motor is directly secured to the second lead screw, without any intervening gears.

25 11. A robot head as claimed in any one of claims 8 to 10 in which the second lead screw has a high lead angle.

12. A robot head as claimed in any one of claims 8 to 11 including a second output position encoder for measuring the angular position of the arm about the second axis.

13. A robot head as claimed in any one of claims 8 to 12 including a second input position encoder for measuring rotation of the second motor.

5 14. A robot head as claimed in claim 12 and claim 13 in which the measurement from the second output position encoder is compared with an expected arm position based on the measurement from the second input position encoder, and an alarm is raised if the expected position is inconsistent with the actual position.

10

15. A robot head as claimed in any one of claims 8 to 14 in which the first axis is perpendicular to the second.

15

16. A robot head as claimed in any one of the preceding claims in which the arm is extendible along a third axis.

17. A robot head as claimed in claim 15 and claim 16 in which the first, second and third axes intersect at a point.

20

~~18. A robot head as claimed in claim 16 in which the arm is extendible on a~~  
third lead screw which is rotated by a third rotational motor.

19. A robot head as claimed in any one of claims 16 to 18 including a third output position encoder for measuring the extension position of the arm.

25

20. A robot head as claimed in claim 18 including a third input position encoder for measuring rotation of the third motor.

21. A robot head as claimed in claim 19 and claim 20 in which the measurement from the third output position encoder is compared with an expected arm extension position based on the measurement from the third input encoder, and an alarm is raised if the expected position is inconsistent with the actual position.

22. A back-drivable robot head including:

- (a) a manually-graspable driving member;
- (b) a force sensor for sensing forces applied to the driving member by a user;
- (c) an arm for carrying a tool the position of which is to be controlled; and
- (d) a first rotation control mechanism for rotating the arm about a first axis in response to the sensed forces;

characterised in that the first rotation control mechanism comprises a first rotational motor (30'), an output of which is converted first to longitudinal motion and then back to rotational motion of the arm.

23. A back-drivable robot head including:

- (a) a manually-graspable driving member;
- (b) a force sensor for sensing forces applied to the driving member by a user;
- (c) an arm for carrying a tool the position of which is to be controlled; and
- (d) a first rotation control mechanism for rotating the arm about a first axis in response to the sensed forces;

characterised in that the first rotation control mechanism comprises a first rotational motor (30'), an output of which is converted first to longitudinal motion and then back to rotational motion of the arm; the head further

including a first input encoder for measuring rotation of the first motor (30'), a first output encoder for measuring the angular position of the arm about the first axis, and in which the measurement from the first output position encoder is compared with an expected arm position based on the measurement from the first input position encoder, an alarm being raised if the expected position is inconsistent with the actual position.



**ABSTRACT**

A robot head, for example for use in surgery, provides a back-drivable system allowing a surgeon to closely control the position of a cutter or other tool. The  
5 cutter is mounted at the end of a telescopic arm (20) which can be rotated about two independent perpendicular axes. Rotation about each axis is controlled by a separate motor (30') which turns a lead screw (32). A bearing (34) travels along the lead screw and changes the angle of an offset crank (36) to cause the required rotation about the axis. The current rotational position about each  
10 axis is determined by a sensor at the output. A second sensor independently determines the position of the corresponding motor (30) and the two measured positions are compared. If they differ, the power to the cutter is immediately switched off.

(Figure 1)

1/5

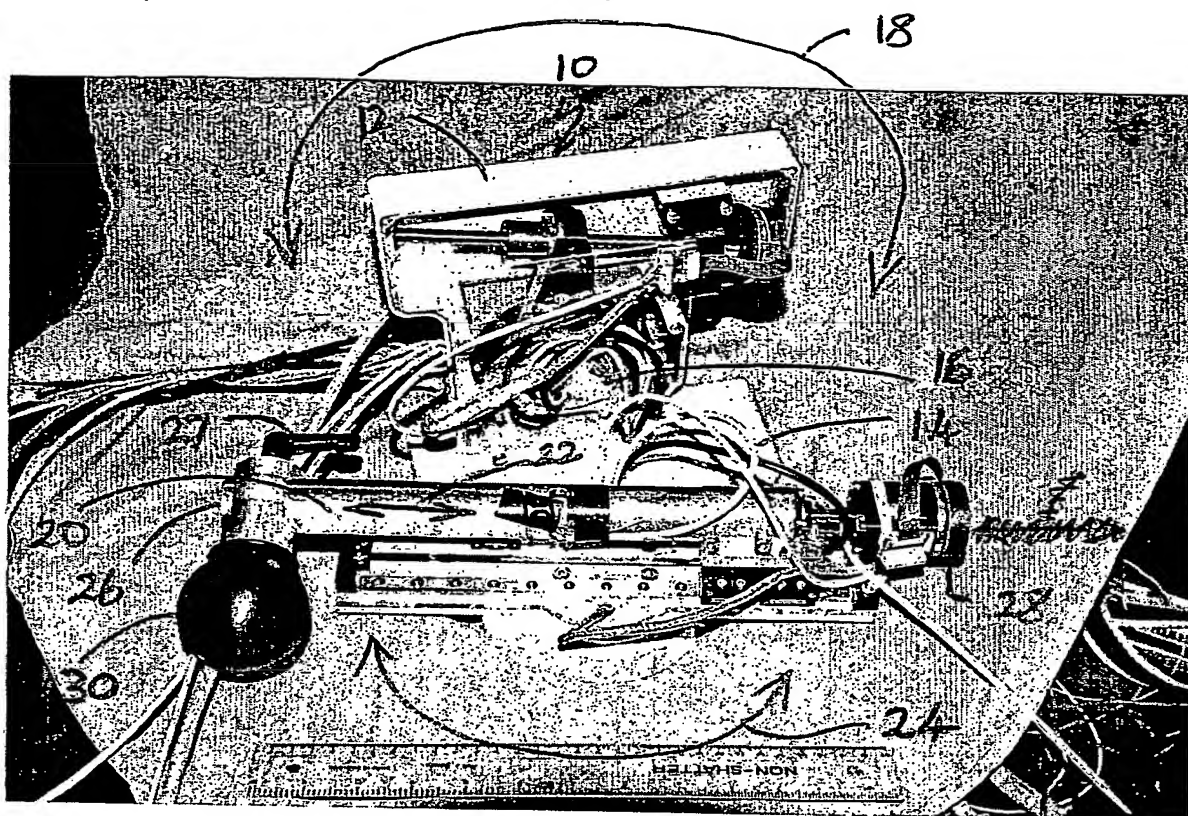


Figure 1

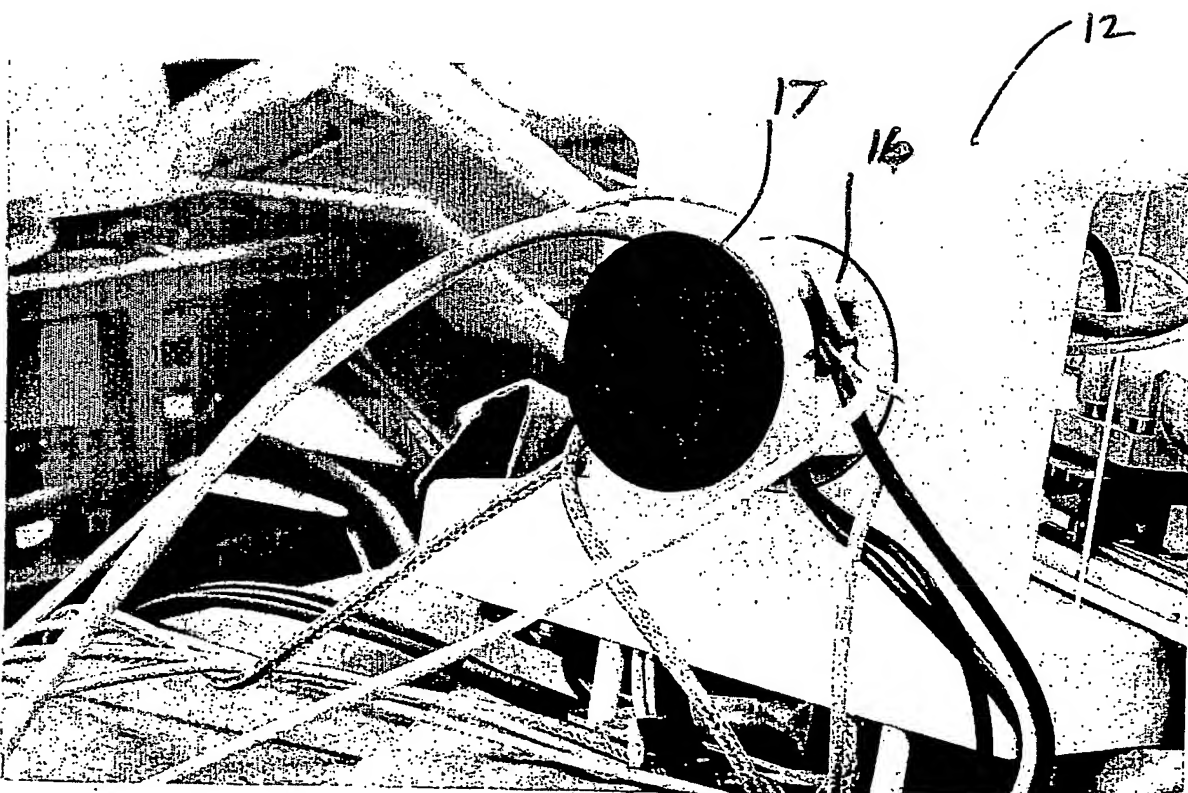


Figure 2

2/5

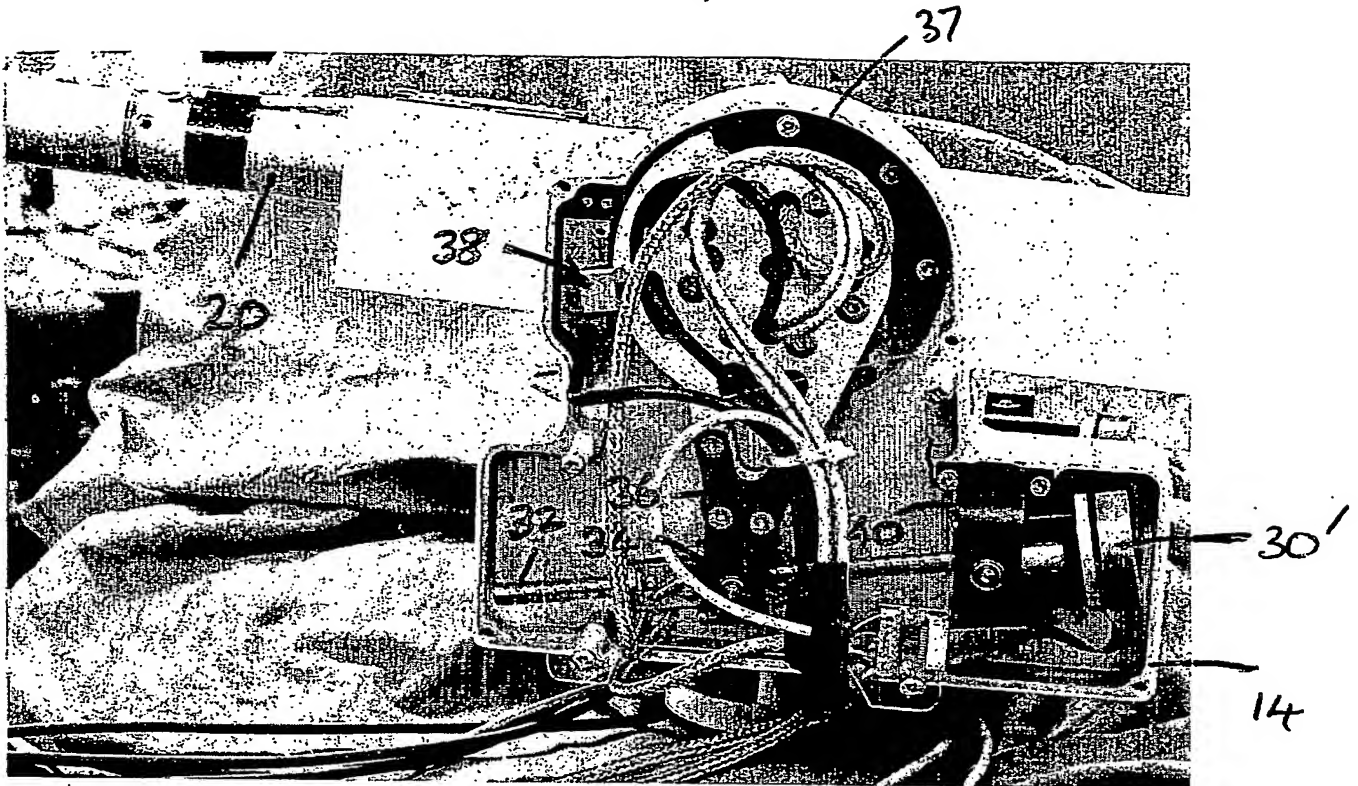


Figure 3

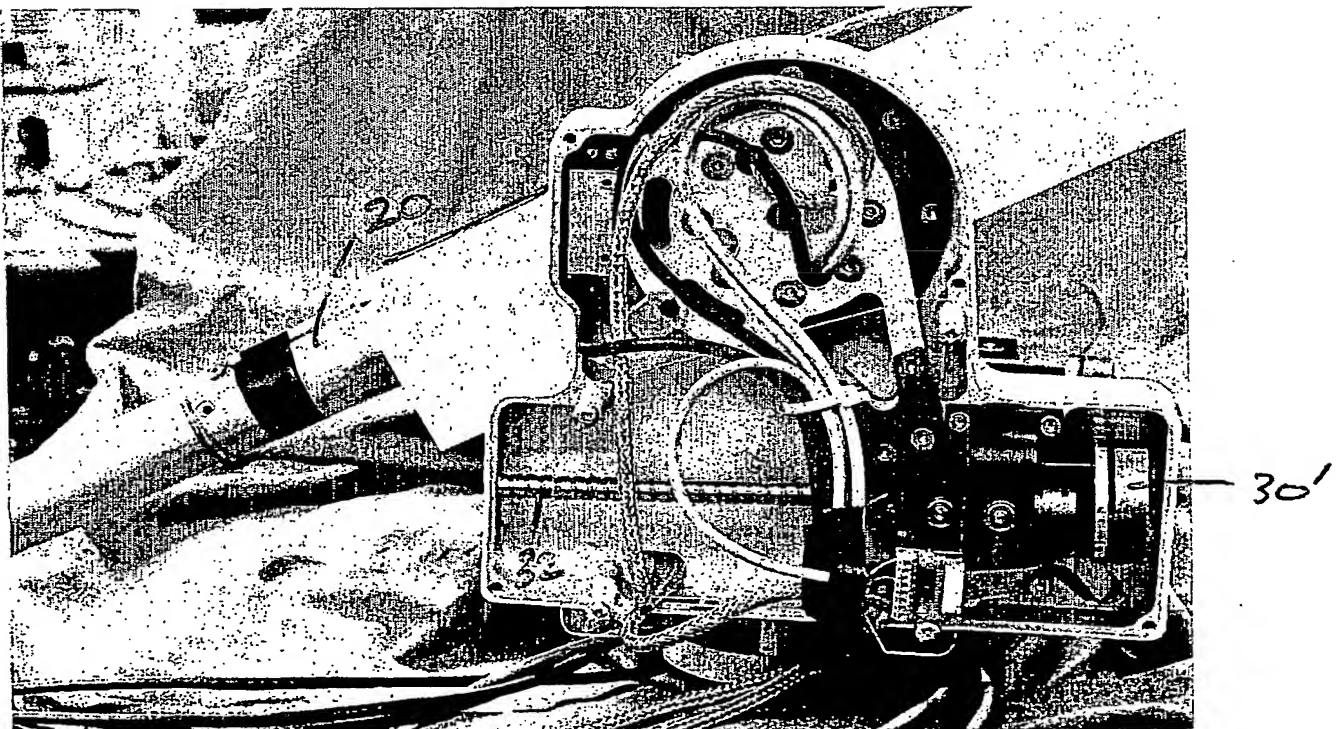


Figure 4

3/5

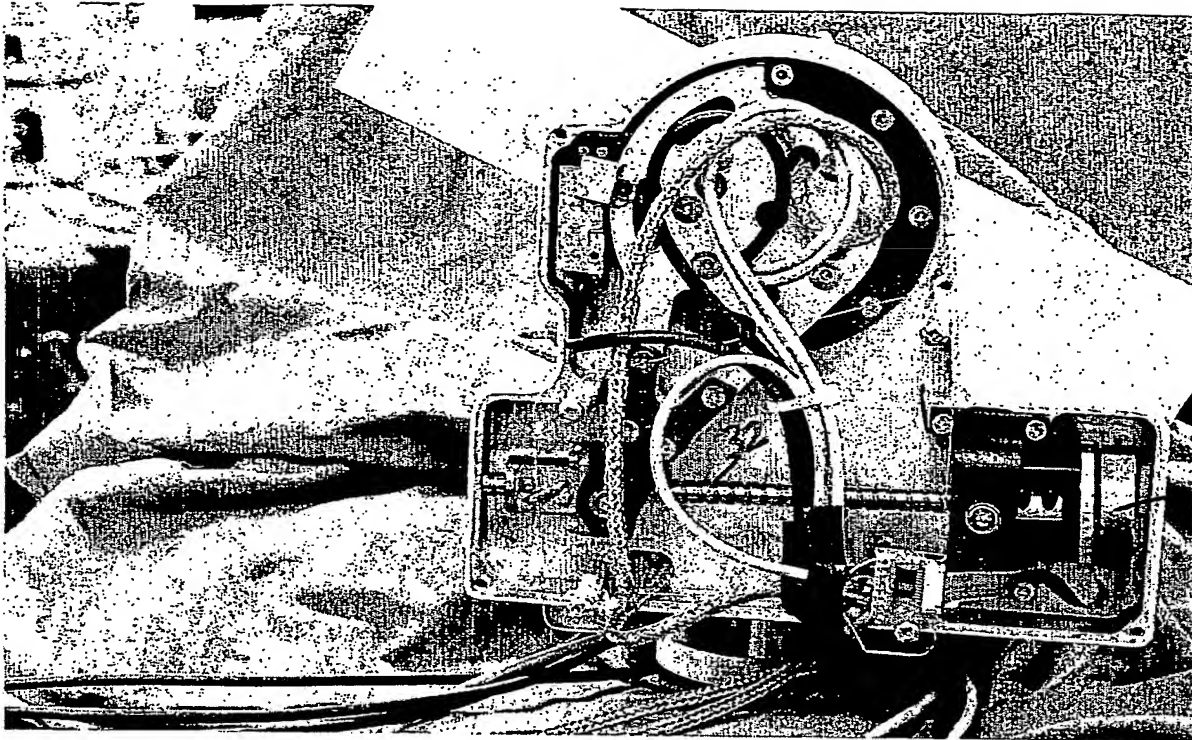


Figure 5

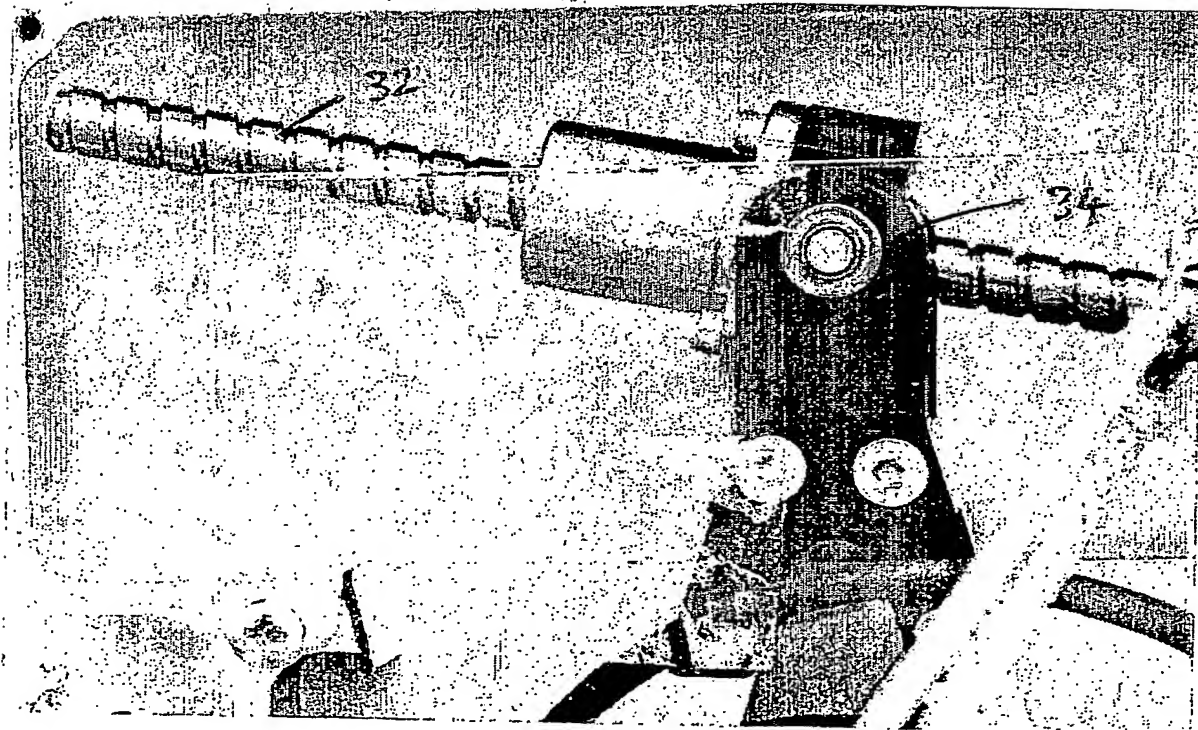


Figure 6



4/5

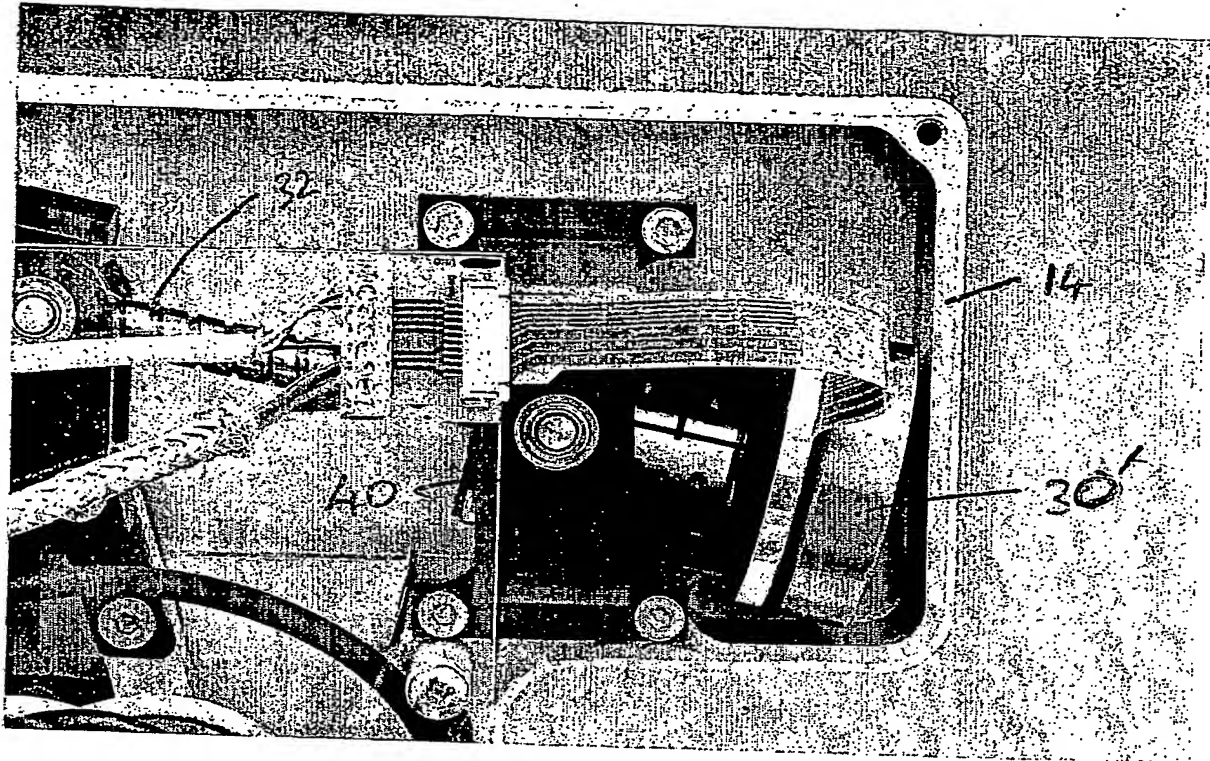


Figure 7

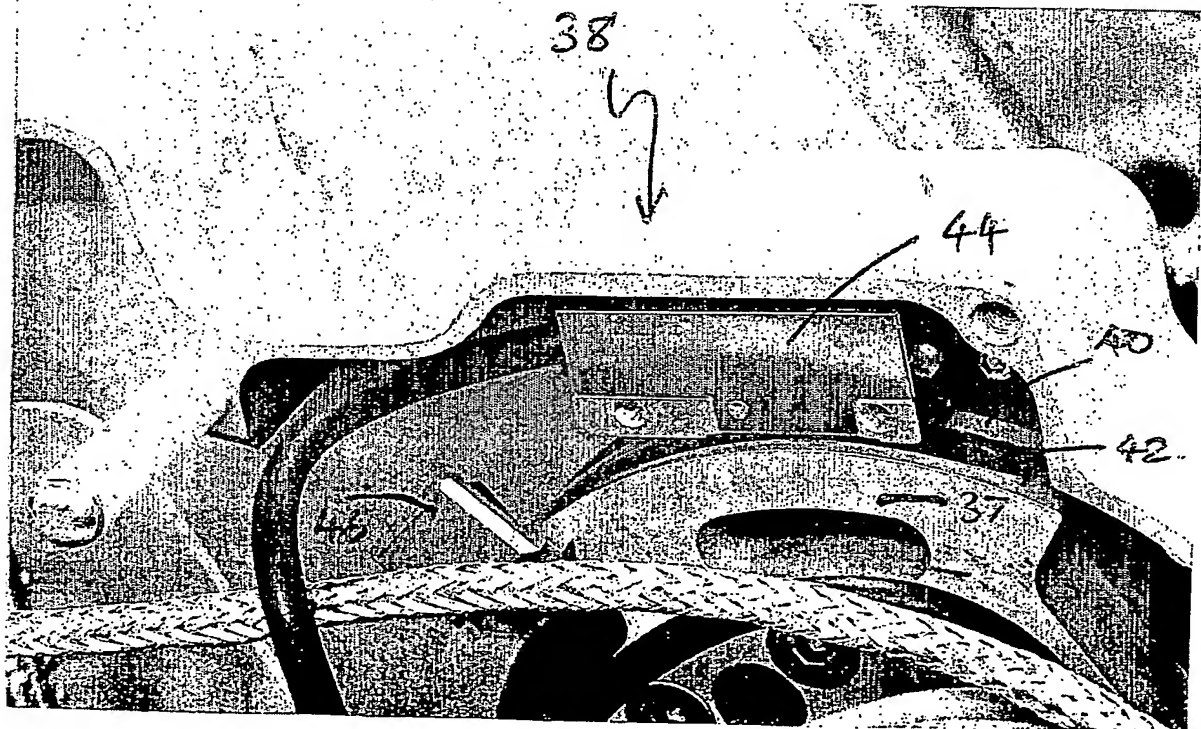


Figure 8

5/5

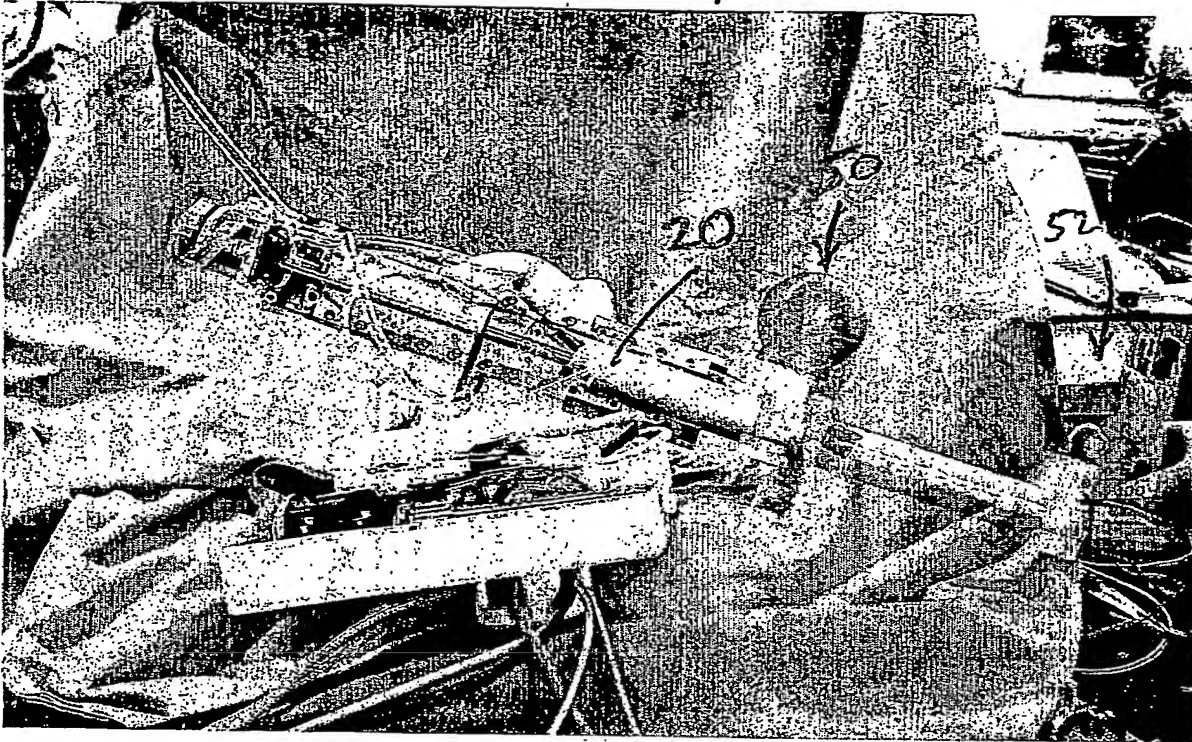


Figure 9

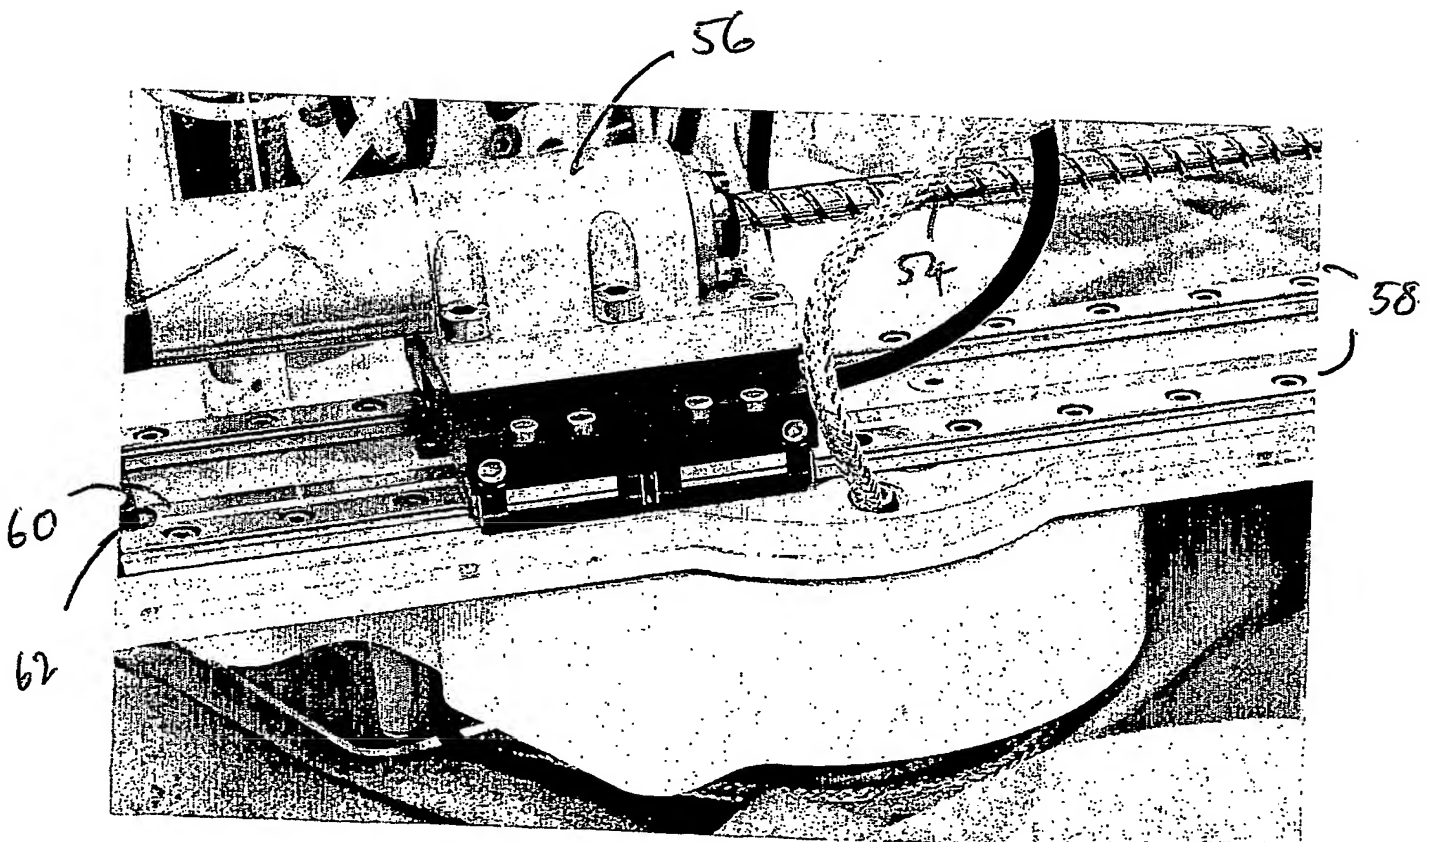


Figure 10

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**